


# Sonex Pyramid Panels

**Sonex Pyramid** Panels offer outstanding acoustic control across all frequencies with Noise Reduction Coefficient (NRC) ranging from 0.75 to 1.05. The unique geometric design of these panels dramatically increases the panels' surface area, providing much more acoustic control than flat surfaces. Sonex Pyramid Panels are made from Pinta's willtec foam, which is Class 1 fire-rated according to ASTM E 84 for flame spread and smoke density. Willtec natural also meets the corner burn test UL 1715.

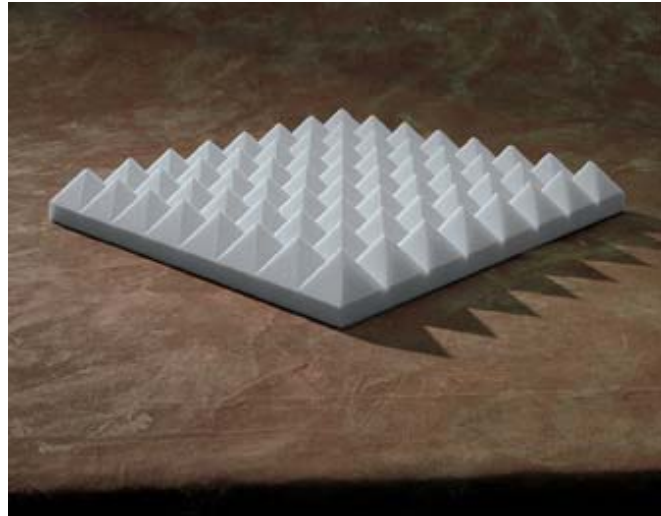

Panels can be easily mounted to any wall or ceiling surface with Pinta's Acoustic water based adhesive. Once installed, the 24" x 24" panels align to make an attractive, seamless pattern.

**Coefficients per ASTM C423-90a**

	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC
2"	0.07	0.25	0.60	0.94	0.97	1.08	0.70
3"	0.09	0.37	0.81	1.01	1.03	1.07	0.80
4"	0.18	0.44	0.96	1.14	1.18	1.19	0.95
6"	0.16	0.62	1.10	1.20	1.21	1.22	1.05

Panel Size	Standard 24" x 24"
Panel Thickness	2", 3", 4", 6"
Fire Resistance	ASTM E 84 Class 1
Finish	Natural white or Natural gray
Installation	Sonex Acoustic latex adhesive; adheres to wall paneling, wood, plywood, metal and concrete

**West General LLC**  
 1475 Saratoga Ave, Suite 120  
 San Jose, CA 95129  
 Phone: 408-255-8644 Fax: 408-255-8677  
[www.westgeneral.com](http://www.westgeneral.com)